


- Fully galvanized body with flanges
- Stainless steel hinge assembly and springs
- Non-slamming positive seal spring
- Rubber to rubber seats available
- Vulcanized rubber gate
- Each valve is individually tested
- Working pressure is 125 PSI
- Standard 3/4" injection port
- Standard 4" inspection port
- Standard 2" nipple for air relief
- Available in sizes 4, 6, 8, 10 and 12
- State Certified



MADE IN THE U.S.A

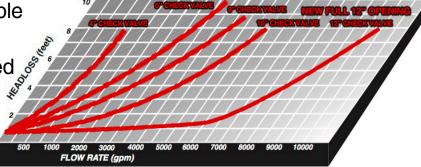