


Clemons Mini Inline Filters

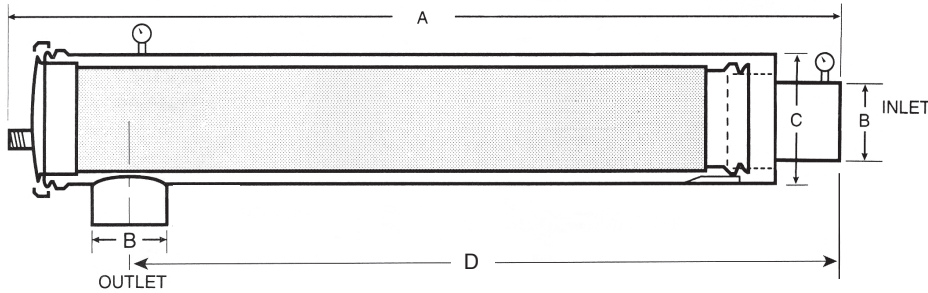

24 Gage

Stainless Steel Screen

1/32" - .031" Protection for most systems
 3/64" - .045" Protection for most systems
 3/32" - .094" Protection for most systems

STANDARD EQUIPMENT

Barrels – Galv. or Epoxy
 Ring Band Lock
 Replaceable Gaskets
 2" and 3" FIPT Connection
 Self-Cleaning Blow Off
 (2) 1/4" Pressure Gauge Ports
 0-125 Working Pressure

OPTIONAL EQUIPMENT

1" to 4" FIPT Connections
 (2) Pressure Gauges
 Blow Off Valve (Gate or Ball)
 All Stainless Steel
 Larger Inlet and Outlet
 Air Relief Valve & 2" Half Coupler
 Flanged Connections

New 24 Gage Perforated Sizes Available

Add 10% to filter price for these four sizes
 1/64" - .020" Fine system protection
 1/8" - .125" Coarse system protection
 3/16" - .188" Coarse system protection
 1/4" - .250" Coarse system protection

Model	GPM	A	B	C	D	Blow Off Outlet	Weight
M80	70	24"	2" FIPT	6"	15 3/4"	1"	27
M150	130	36"	3" FIPT	6"	27 3/4"	1"	37

SYSTEM PROTECTION FROM ALL TYPES OF SEDIMENT
 Protection for the Home, Landscape and Agricultural
 Irrigation, and Industrial Applications.



Manufacturers and Distributors of Irrigation and Industrial Equipment
 6983 Supply Way • Boise, Idaho 83716
 (208) 345-2525 / Toll Free 1-800-635-5975
 FAX 1-208-345-2143
 www.clemonssales.net
 e-mail purchasing@clemonssales.net