



# Clemons Pressure Fine Filters

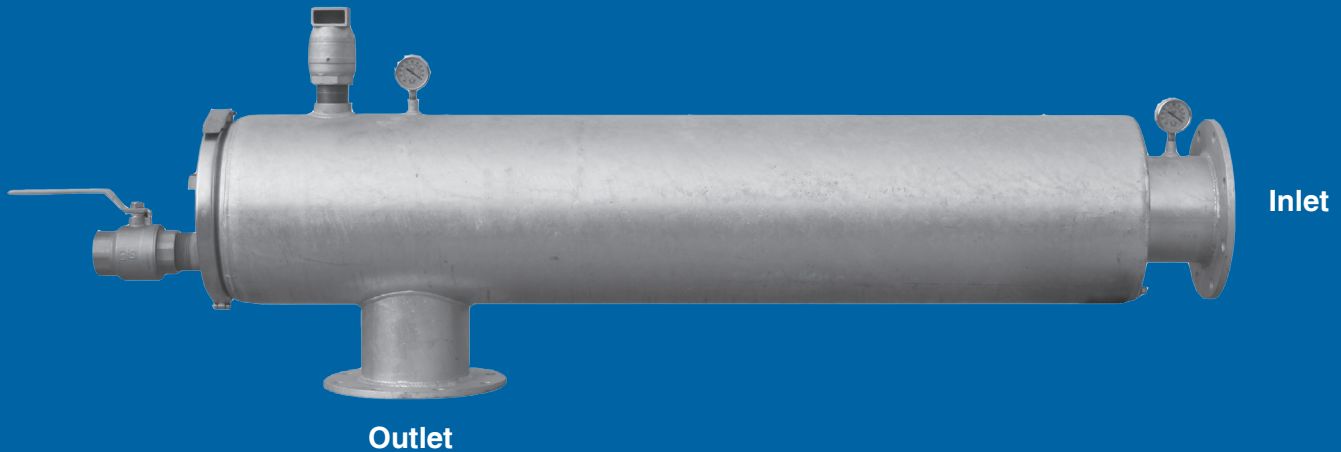

Standard Down Shown - Center Up to Pivot Is Also Standard

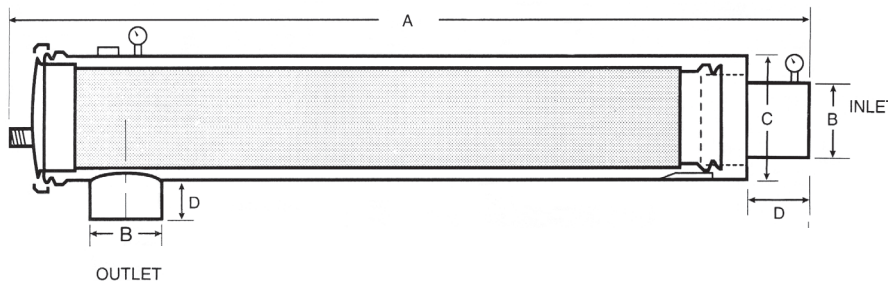

## 24 Gage Stainless Steel Screen

3/64" - .045" Protection for most systems  
3/32" - .094" Protection for most systems

### STANDARD EQUIPMENT

- Barrels – Galv. or Enamel
- Ring Band Lock
- Replaceable Gaskets
- Can Be Welded Into Line
- Stainless Steel Screens
- Self Cleaning Blow Off
- 0-125 Working Pressure
- Winter Drain Port
- (2) 1/4" Pressure Gauge Ports
- 2" Air Vent Coupler Only

### OPTIONAL EQUIPMENT

- (2) Pressure Gages 1/4"
- Filter Manifolds Available
- Blow Off Valve (Gate or Ball)
- 2" Air Vent Valve
- Flanged, RingLock or Victaulic Ends
- Larger Blow Off up to 4"
- Outlet In Any Position (Pivot Pad to Pivot)
- All Stainless Steel
- Screen Brushes - Catalog Page 8
- 125 to 175 Working Pressure

### New Perforated Size Available

Ask for prices on these sizes

- 1/32" - .031" Protects pivots and other systems
- 1/8" - .125" Coarse system protection
- 3/16" - .188" Coarse system Protection
- 1/4" - .250" Coarse system protection

Model	GPM	A	B	C	D	Blow Off Outlet	Weight
275A	275	68"	4"	6 5/8"	6"	1"	70
475A	475	70"	4"-6"	12"	6"	2"	130
700A	700	77"	4"-10"	14"	6"	2 1/2"	170
1200A	1200	130.5"	4"-10"	14"	6"	2 1/2"	250
2000A	2000	139.8"	4"-12"	16"	6"	4"	412

## SYSTEM PROTECTION FROM ALL TYPES OF DEBRIS AND LOW LEVELS OF SAND



Manufacturers and Distributors of Irrigation and Industrial Equipment  
6983 Supply Way • Boise, Idaho 83716  
(208) 345-2525 / Toll Free 1-800-635-5975  
FAX 1-208-345-2143  
www.clemonssales.net  
e-mail purchasing@clemonssales.net